

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 March 2003 (06.03.2003)

PCT

(10) International Publication Number
WO 03/018688 A1

(51) International Patent Classification⁷: **C08L 53/02**,
63/00, 63/02, C08G 59/68, C09J 163/00, C09D 127/06,
C08L 23/08, 77/06, C08J 9/00

(21) International Application Number: PCT/US02/23957

(22) International Filing Date: 29 July 2002 (29.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/939,245 24 August 2001 (24.08.2001) US

(71) Applicant: **L & L PRODUCTS, INC.** [US/US]; 160
McLean Drive, Romeo, MI 48065 (US).

(72) Inventors: **CZAPLICKI, Michael, J.**; 1035 Pointe Place,
Rochester, MI 48307 (US). **BRADLEY, Renee**; 2655 Ar-
lington, St. Clair, MI 48079 (US). **BRADLEY, Jeff**; 389
S. Summers Street, Imlay City, MI 48444 (US).

(74) Agent: **DOBRUSIN, Eric, M.**; Dobrusin & Thennisch
PC, Suite 311, 401 S. Old Woodward Avenue, Birmingham,
MI 48009 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: PAINTABLE MATERIAL

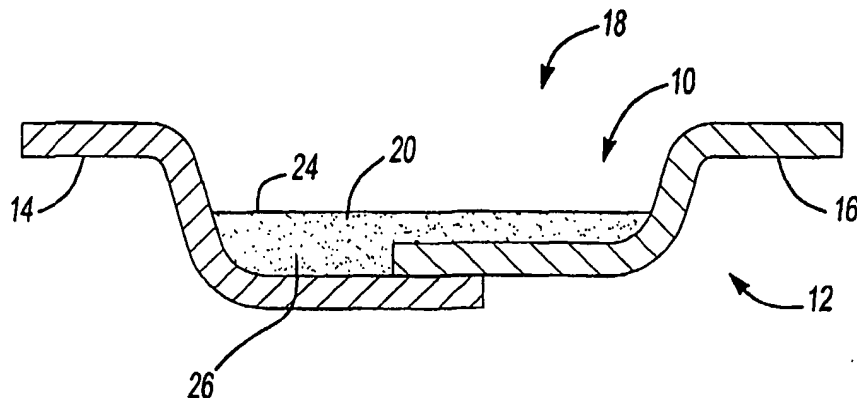

(57) Abstract: A material (10) for sealing a substrate (12) and articles incorporating the same. The sealant material includes up to about 80 % of an epoxy resin; up to about 40 % of an epoxy/elastomer hybrid; up to about 40 % of a rheology modifier; up to about 5 % of a blowing agent; up to about 7 % of a curing agent; and about 40 to about 60 % of a filler.

WO 03/018688 A1

PAINTABLE MATERIAL

FIELD OF THE INVENTION

The present invention relates to paintable materials, and particularly sealant
5 materials for covering a surface.

BACKGROUND OF THE INVENTION

Sealant materials are often applied to surfaces for sealing or for otherwise
covering the surface, including any joints associated therewith. There presently exist
10 a vast number of sealant materials that serve these purposes for different articles of
manufacture. However, in certain circumstances, it may be desirable for sealant
materials to serve other additional purposes depending on the components or
articles of manufacture to which the sealant materials are applied.

For example, in some industries, such as the furniture, appliance or
15 automotive industries, joints are typically part of a show surface, and are thus visible
to a user or consumer. Accordingly, one desirable characteristic for a sealant for
covering the joint is to provide a generally smooth or continuously or controlled
patterned surface that is cosmetically pleasing. If colorant is not already included in
the sealant, but a color is desirable, preferably the sealant material is paintable.

20 Certain assembly operations in the aforementioned industries and others, require
that a sealant be heated along with the article to which it is applied. For instance,
some priming or painting operations are conducted at elevated temperatures. Thus,
another desirable trait for certain sealants is that they exhibit attractive temperature
response characteristics for a desired application. For example, a metal shelving
25 unit having a sealant applied to a joint thereon, upon heat exposure, advantageously
will not experience random oozing, bubbling, rippling, or the like, which would require
post treatment clean-up processes.

Further, in certain applications it may also be desirable for the sealant
material to self level or otherwise flow in a predetermined manner during or after
30 application of the material such that the sealant can properly function.

SUMMARY OF THE INVENTION

The present invention meets the above needs by providing an improved
35 paintable sealant material, and articles incorporating the same, including:

- (a) an epoxy resin material;
- (b) an epoxy/elastomer mixture;
- (c) a rheology modifier
- (d) a blowing agent;
- 5 (e) a curing agent; and
- (f) a filler.

The sealant material and methods of using it disclosed herein are particularly adapted for enabling the material to be painted using conventional or art-disclosed coating techniques.

10 The sealant material may be applied to a surface, or to joints within or between one or more surfaces. In some applications, the sealant material can be used for bonding a first surface to a second surface. The sealant material is extrudable, moldable, or processable using other art-disclosed techniques. In one particularly advantageous aspect, the sealant material is used for sealing or
15 otherwise covering visible joints or, hems on articles of manufacture such as, refrigerator doors, range tops, dishwashers, freezers, microwave ovens, desk tops, desk drawers, chair bumpers, filing cabinets, shelving, or the like.

The sealant material alternatively is applied to a variety of components of an automotive vehicle such as hem flanges, fuel filler doors, fuel filler assemblies,
20 license plates, doors, door frames, ditches, vehicle grille assemblies, bumper guards, consoles, name plates, badges or the like. Moreover, in certain embodiments, the sealant material is attached to a substrate of a component as a separate pre-formed seal, e.g., molded into a desired configuration.

One additional particularly attractive feature of the present invention is the
25 ability, in some applications, to employ the sealant material by itself and without any separately fabricated support substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

The features and inventive aspects of the present invention will become more
30 apparent upon reading the following detailed description, claims, and drawings, of which the following is a brief description:

Fig. 1 illustrates a sectional view of an exemplary sealant material formed in accordance with an aspect of the present invention;

Fig. 2 illustrates a sectional view of the sealant material of Fig. 1 after a portion of the sealant material has been cured according to another aspect of the present invention;

Fig. 3 illustrates a sectional view of the sealant material of Figs. 1-2 as applied to an example of a substrate;

Fig. 4 illustrates a sectional view of the sealant material of Figs. 1-3 after the material has flowed onto the substrate;

Fig. 5 illustrates an example of how an extruder might be used to form and/or apply the sealant material of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is predicated upon an improved sealant material, and articles incorporating the same, including:

- (a) up to about 80% of an epoxy resin;
- (b) up to about 40% of an epoxy/elastomer;
- (c) up to about 40% of a rheology modifier;
- (d) up to about 5% of a blowing agent;
- (e) up to about 7% of a curing agent; and
- (f) a filler.

Percentages herein refer to weight percent, unless otherwise indicated.

Epoxy Resin

Epoxy resin is used herein to mean any of the conventional dimeric, oligomeric or polymeric epoxy materials containing at least one epoxy functional group. The polymer based materials may be epoxy containing materials having one or more oxirane rings polymerizable by a ring opening reaction. In preferred embodiments, the sealant material includes up to about 80 % of an epoxy resin. More preferably, the sealant includes between about 10 % and 50% by weight of epoxy containing materials.

The epoxy containing materials may be aliphatic, cycloaliphatic, aromatic or the like. The epoxy may be supplied as a solid (e.g., as pellets, chunks, pieces or the like) or a liquid (e.g., an epoxy resin). The epoxy may include an ethylene copolymer or terpolymer that may possess an alpha-olefin. As a copolymer or

terpolymer, the polymer is composed of two or three different monomers, i.e., small molecules with high chemical reactivity that are capable of linking up with similar molecules. Preferably, an epoxy resin is added to the sealant material to increase the flow properties of the material. One exemplary epoxy resin may be a phenolic resin, which may be a novalac type or other type resin. Other preferred epoxy containing materials may include a bisphenol-A epichlorohydrin ether polymer, or a bisphenol-A epoxy resin which may be modified with butadiene or another polymeric additive.

Epoxy/Elastomer

In a highly preferred embodiment, one or more of the epoxy containing materials may be provided to the sealant material as an epoxy/elastomer hybrid, e.g., a blend or copolymer that has been previously fabricated. The epoxy/elastomer hybrid may be included in an amount of up to about 40 % by weight of the sealant material. More preferably, the epoxy/elastomer hybrid is approximately 10 to 30%, and more preferably is about 20 % by weight of the sealant material.

In turn, the hybrid itself generally includes about 1:5 to 5:1 parts of epoxy to elastomer, and more preferably about 1:3 to 3:1 parts of epoxy to elastomer. In one preferred embodiment, the epoxy/elastomer hybrid preferably includes approximately 40 to 80 % of an epoxy resin (such as disclosed in the above), and about 20 to 60 % of an elastomer compound. The elastomer compound may be any suitable art disclosed thermoplastic elastomer, thermosetting elastomer or a mixture thereof. Exemplary elastomers include, without limitation natural rubber, styrene-butadiene rubber, polyisoprene, polyisobutylene, polybutadiene, isoprene-butadiene copolymer, neoprene, nitrile rubber, butyl rubber, polysulfide elastomer, acrylic elastomer, acrylonitrile elastomers, silicone rubber, polysiloxanes, polyester rubber, diisocyanate-linked condensation elastomer, EPDM (ethylene-propylene diene rubbers), chlorosulphonated polyethylene, fluorinated hydrocarbons and the like. In one embodiment, recycled tire rubber is employed.

The epoxy/elastomer hybrid, when added to the sealant material, preferably is added to modify structural properties of the sealant material such as strength, toughness, stiffness, flexural modulus, or the like. Additionally, the epoxy/elastomer hybrid may be selected to render the sealant material more compatible with coatings such as water-borne paint or primer system or other conventional coatings.

Rheology Modifier

Preferably, the sealant material includes one or more materials for controlling the rheological characteristics of the sealant material over a range of temperatures (e.g., up to about 250° C). When used, the rheology modifier preferably is present in
5 an amount up to about 40%, and more preferably between about 1 to about 20%, and still more preferably less than about 10%. Of course, higher amounts are possible as well.

In one embodiment, any suitable art-disclosed rheology modifier may be
10 used, and thus the rheology modifier may be organic or inorganic, liquid or solid, or otherwise. In a particularly preferred embodiment, the rheology modifier is a polymer, and more preferably one based upon an olefinic (e.g., an ethylene, a butylenes, a propylene or the like), a styrenic (e.g., a styrene-butadiene-containing rubber), an acrylic or an unsaturated carboxylic acid or its ester (such as acrylates,
15 methacrylates or mixtures thereof; e.g., ethylene methyl acrylate polymer). The rheology modifier may be provided in a generally homogeneous state or suitable compounded with other ingredients.

It may be possible to use certain acetates (e.g., EVA) in accordance with the present invention for certain applications. However, it is preferably that the rheology
20 modifier (or the entire sealant) be substantially free of an acetate in view of the propensity for decomposition at higher temperatures and the attendant potential deleterious release of acetic acid onto a painted surface.

Blowing Agent

25 One or more blowing agents may be added to the sealant material for producing inert gasses that form as desired an open and/or closed cellular structure within the sealant material. In this manner, it may be possible to lower the density of articles fabricated from the material. In addition, the material expansion helps to improve sealing capability.

30 The blowing agent may include one or more nitrogen containing groups such as amides, amines and the like. Examples of suitable blowing agents include azodicarbonamide, dinitrosopentamethylenetetramine, azodicarbonamide, dinitrosopentamethylenetetramine, 4,4'-oxy-bis-(benzenesulphonylhydrazide), trihydrazinotriazine and N, N'-dimethyl-N,N'-dinitrosoterephthalamide. In a highly

preferred embodiment, modified and unmodified azocarbonamides may be supplied to the material 10 in particle form having particles sizes of, for example, 120 and 180 microns. Advantageously, the azocarbonamides can assist the sealant material in leveling itself (i.e., forming a surface of maintaining the surface 24 in a substantially flat condition).

An accelerator for the blowing agents may also be provided in the sealant material. Various accelerators may be used to increase the rate at which the blowing agents form inert gasses. One preferred blowing agent accelerator is a metal salt, or is an oxide, e.g. a metal oxide, such as zinc oxide.

Amounts of blowing agents and blowing agent accelerators can vary widely within the sealant material depending upon the type of cellular structure desired, the desired amount of expansion of the sealant material, the desired rate of expansion and the like. Exemplary ranges for the amounts of blowing agents and blowing agent accelerators in the sealant material range from about 0 % by weight to about 5 % by weight and are preferably in the sealant material in fractions of weight percentages.

Curing Agent

One or more curing agents and/or curing agent accelerators may be added to the sealant material. Amounts of curing agents and curing agent accelerators can, like the blowing agents, vary widely within the sealant material depending upon the type of cellular structure desired, the desired amount of expansion of the sealant material, the desired rate of expansion, the desired structural properties of the sealant material and the like. Exemplary ranges for the curing agents or curing agent accelerators present in the sealant material range from about 0 % by weight to about 7 % by weight.

Preferably, the curing agents assist the sealant material in curing by crosslinking of the polymers, epoxy resins (e.g., by reacting in stoichiometrically excess amounts of curing agent with the epoxide groups on the resins) or both. It is also preferable for the curing agents to assist in thermosetting the sealant material. Useful classes of curing agents are materials selected from aliphatic or aromatic amines or their respective adducts, amidoamines, polyamides, cycloaliphatic amines (e.g., anhydrides, polycarboxylic polyesters, isocyanates, phenol-based resins (such as phenol or cresol novolak resins, copolymers such as those of phenol terpene,

polyvinyl phenol, or bisphenol-A formaldehyde copolymers, bishydroxyphenyl alkanes or the like), or mixtures thereof. Particular preferred curing agents include modified and unmodified polyamines such as triethylenetetramine, diethylenetriamine tetraethylenepentamine, cyanoguanidine and the like. An
5 accelerator for the curing agents (e.g., methylene diphenyl bis urea) may also be provided for preparing the sealant material.

Filler

The sealant material may also include one or more fillers, including but not
10 limited to particulated materials (e.g., powder), beads, microspheres, or the like. Preferably the filled includes a relatively low-density material that is generally non-reactive with the other components present in the sealant material.

Examples of fillers include silica, diatomaceous earth, glass, clay, talc, pigments, colorants, glass beads or bubbles, glass, carbon ceramic fibers,
15 antioxidants, and the like. Such fillers, particularly clays, can assist the sealant material in leveling itself during flow of the material. The clays that may be used as fillers may include clays from the kaolinite, illite, chloritem, smectite or sepiolite groups. Examples of suitable fillers include, without limitation, talc, vermiculite, pyrophyllite, sauconite, saponite, nontronite, montmorillonite or mixtures thereof.
20 The clays may also include minor amounts of other ingredients such as carbonates, feldspars, micas and quartz. The fillers may also include ammonium chlorides such as dimethyl ammonium chloride and dimethyl benzyl ammonium chloride. Titanium dioxide might also be employed.

In one preferred embodiment, one or more mineral or stone type fillers such
25 as calcium carbonate, sodium carbonate or the like may be used as fillers. In another preferred embodiment, silicate minerals such as mica may be used as fillers. It has been found that, in addition to performing the normal functions of a filler, silicate minerals and mica in particular.

When employed, the fillers in the sealant material can range from 10 % to 90
30 % by weight of the sealant material. According to some embodiments, the sealant material may include from about 0 % to about 3 % by weight, and more preferably slightly less than 1 % by weight clays or similar fillers. Powdered (e.g. about 0.01 to about 50, and more preferably about 1 to 25 micron mean particle diameter) mineral type filler can comprise between about 5 % and 70 % by weight, more preferably

about 40% to about 60%, and still more preferably approximately 55 % by weight of the sealant material. In one highly preferred embodiment the sealant material may contain approximately 7% by weight mica.

5 Other Additives

Other additives, agents or performance modifiers may also be included in the sealant material as desired, including but not limited to a UV resistant agent, a flame retardant, an impact modifier, a heat stabilizer, a colorant, a processing aid, a lubricant, a reinforcement (e.g., chopped or continuous glass, ceramic, aramid, or carbon fiber or the like).

Other polymers may also be incorporated into the sealant material, e.g., by copolymerization, by blending, or otherwise. For example, without limitation, other polymers that might be appropriately incorporated into the sealant material include halogenated polymers, polycarbonates, polyketones, urethanes, polyesters, silanes, sulfones, allyls, olefins, styrenes, acrylates, methacrylates, epoxies, silicones, phenolics, rubbers, polyphenylene oxides, terphthalates, or mixtures thereof. Other potential polymeric materials may be or may include include, without limitation, polyethylene, polypropylene, polystyrene, polyolefin, polyacrylate, poly(ethylene oxide), poly(ethyleneimine), polyester, polyurethane, polysiloxane, polyether, polyphosphazine, polyamide, polyimide, polyisobutylene, polyacrylonitrile, poly(vinyl chloride), poly(methyl methacrylate), poly(vinyl acetate), poly(vinylidene chloride), polytetrafluoroethylene, polyisoprene, polyacrylamide, polyacrylic acid, polymethacrylate, and polyacetals.

When determining appropriate components for the sealant material, it may be important to form the material such that it will only activate (e.g., flow, foam or otherwise change states) at appropriate times or temperatures. For instance, in most applications, it is undesirable for the material to be reactive at room temperature or otherwise at the ambient temperature in a production environment. More typically, the sealant material becomes activated to flow at higher processing temperatures. As an example, temperatures such as those encountered in an automobile assembly plant may be appropriate, especially when the sealant material is processed along with the other components at elevated temperatures or at higher applied energy levels, e.g., during painting preparation steps. Temperatures

encountered in many coating operations, for instance, range up to about 250°C or higher.

The present materials exhibit the ability to flow and self level to then serve as a generally smooth paintable surface within a temperature range up to about 100°C, more preferably up to about 175°C, still more preferably up to about 250°C, and even
5 still more preferably up to about 325°C.

Formation of the sealant material can be accomplished according to a variety of new or known techniques. Preferably, the sealant material is formed as a material of substantially homogeneous composition. However, it is contemplated that various
10 combining techniques may be used to increase or decrease the concentration of certain components in certain locations of the sealant material.

According to one embodiment, the sealant material is formed by supplying the components of the material in solid form such as pellets, chunks and the like, in liquid form or a combination thereof. The components are typically combined in one
15 or more containers such as large bins or other containers. Preferably, the containers can be used to intermix the components by rotating or otherwise moving the container. Thereafter, heat, pressure or a combination thereof may be applied to soften or liquidize the components such that the components can be intermixed by stirring or otherwise into a single homogenous composition.

20 According to another embodiment, the sealant material may be formed by heating one or more of the components that is generally easier to soften or liquidize such as the polymer based materials to induce those components into a mixable state. Thereafter, the remaining components may then be intermixed with the softened components.

25 Depending upon the components used, it may be important to assure that the temperature of the components remains below certain activation temperatures that might cause the sealant material to activate (e.g., form gasses, flow or otherwise activate), cure (e.g., harden, stiffen or otherwise change states) or both. Notably, when the sealant material contains a blowing agent, it is typically desirable to
30 maintain the temperature of the sealant material below a temperature that will activate the blowing agent during formation of the sealant material or before the sealant material is applied to a surface.

In situations where it is desirable to maintain the sealant material at lower temperatures it may be desirable to maintain the components in a semi-solid or

viscoelastic state using pressure or a combination of pressure and heat to intermix the components of the sealing material. Various machines have been designed to applying heat, pressure or both to materials. One preferred machine is an extruder. According to one embodiment of the present invention, various components may be
5 premixed into one, two or more pre-mixtures and introduced at one or various locations in a single or twin-screw extruder. Thereafter, the heat and pressure provided by the extruder mixes the sealant material in a single generally homogeneous composition, and preferably does so without activating the material.

As an example, and referring to Fig. 5, a first mixture 60 of components may
10 be provided to a throat portion 54 of the extruder 40. Each of the components is preferably provided in solid forms such as chunks, pellets or powders that can be thoroughly mixed together in a tumbler or other mixing receptacle. The first mixture 60 may comprise any of the components discussed above. In a preferred embodiment, the first mixture 60 may include a combination of one or more
15 components, which may be chosen from an epoxy resin, an epoxy/elastomer, a filler, another polymer or a mixture thereof.

As the first mixture 60 is introduced into the extruder 40, the extruder screw
70 mixes the components to form a viscoelastic material that is progressively moved from the throat portion 54 of the extruder 40 and through the intermediate portion 58
20 of the extruder. After substantial mixing of the first mixture 60, a side stream that is preferably liquid is provided to enhance mixing of the components in the extruder 40. The side stream preferably provides an epoxy in resin form that may or may not be combined with other components. Alternatively, the side stream may include any of the polymer materials discussed above.

Toward the die portion 48 of the extruder 40, a second mixture 90 is
25 combined with the first mixture 60 and the material from the side stream. Again, each of the components is preferably provided in solid forms such as chunks, pellets or powders that can be thoroughly mixed together in a tumbler or other mixing receptacle. Moreover, the second mixture 90 is a combination of one or more of the
30 same components that were supplied in the first mixture 60. Additionally, however, any blowing agents, blowing agent accelerators, curing agents or curing agent accelerators are preferably added to the second mixture 90.

Once the first mixture 60, the side stream and the second mixture 90 are combined and mixed, they form the sealant material, which may be emitted from the

extruder 40. The sealant material may then be transported and applied to substrates or, in certain circumstances, the material may be directly applied to a surface as it leaves the extruder 40. The skilled artisan will recognize that various other techniques may be used to form the sealant material from the various components.

5 Figs. 1-4 illustrate an example of a sealant material 10 being applied to a substrate 12. The sealant material 10 may be applied to a variety of substrates. However, for exemplary purposes and with no intention of limiting the invention, the material 10 is shown as applied to components 14, 16 (e.g. overlapping panels) for forming a joint 18. The joint 18, as shown, is formed with overlapping arced portions
10 of the two components 14, 16. In one embodiment, the substrate material is selected from steel, aluminum or plastic (e.g., reinforced plastic).

The sealant material 10 may be initially formed in a variety of shapes, sizes, patterns, thicknesses and the like and may be formed using a variety of forming techniques such as molding, extruding, thermosetting and the like. Alternatively, the
15 sealant material 10 may be initially formed in a substantially liquid state wherein the material 10 is shaped by its container or shaped by a substrate to which the material has been applied. Preferably, the sealant material 10 is initially formed as a single homogeneous melt flowable composition, however, in alternative embodiments, the sealant material 10 may form one layer of a multi-layer article. The sealant material
20 10 may be dry to the touch shortly after it is initially formed to allow easier handling, packaging and the like of the material 10, however, it is also possible for the material 10 to be wet, tacky or both. In one preferred embodiment, shown in Fig. 1, the sealant material 10 has been extruded in a viscoelastic state as an elongated strip, which is shown in cross-section. Of course other section shapes (e.g., having an
25 asymmetrical shape about a longitudinal axis, a symmetrical shape about the longitudinal axis, varying shapes along the longitudinal axis, longitudinal channels or passages, or the like) are contemplated as well and may be formed as desired or needed for any chosen application. It may also be possible to co-extrude the sealant material with a strip or wire (e.g., for forming an encapsulated or laminated strip or
30 wire, such as for making an antenna for a communications system). Molded or die-cut articles may also be formed from the sealant material of the present invention.

Once the sealant material 10 has been formed in a desired configuration, the material may be activated, cured or both to form a seal of a desired configuration. Activation of the sealant material, curing of the material or both may take place in a

single stage or multiple stages and may utilize a variety of stimuli to cause activation or curing. Activation, as used herein, generally denotes inducing the sealant material 10 to flow, foam or generally soften and can be caused by exposure of the sealant material 10 to a variety of stimuli such as heat, light, electricity, pressure, moisture and the like. Curing, as used herein, generally denotes any stiffening, hardening, solidifying or the like of the sealant material and can be caused by exposure to a variety of stimuli such as cooling, light and the like.

Activation of the material may include at least some degree of foaming or bubbling in situations where the sealant material includes a blowing agent. Such foaming or bubbling can assist the sealant material in wetting a substrate and forming an intimate bond with the substrate. Alternatively, however, it shall be recognized that the sealant material may be activated to flow without foaming or bubbling and may still substantially wet the substrate to form a desired seal.

According to one embodiment, the sealant material may be activated prior to application of the sealant material to a substrate such that the sealant material is in a generally flowable state when it is applied to the substrate. In such a situation, curing of the material may occur during or after the time the sealant material is applied to the substrate.

According to another embodiment, the sealant material 10 may undergo a single stage activation, a single stage cure or both. In the embodiment, the sealant material is typically placed adjacent (e.g., in direct contact with or near) a substrate upon which the sealant material is to form a seal. Thereafter, the sealant material 10 is activated by exposure to a stimulus such as energy in the form of heat, light or otherwise that activates the sealant material 10 to flow over the substrate. Then, after a desired amount of flow has been induced, the sealant is cured substantially throughout its volume to form a seal upon the substrate.

According to still other embodiments, the sealant material 10 may undergo a selective multiple stage activation, a multiple stage cure or both. For example, a portion of the sealant material 10 may be exposed to a stimulus to at least partially cure a portion of the sealant material, e.g. a cure to a predetermined depth (e.g., on the order of about 1 mil to about 2 mm), or a cure in certain regions along or within the mass of material. In Fig. 2, the sealant material 10 is illustrated with a partially cured portion 20 that was formed by exposing at least one portion of the surface 24 of the sealant material to ultraviolet (UV) light, UV radiation, moisture, infrared light,

heat or the like from a stimulus source to cross-link or otherwise cure the partially cured portion 20. As can be seen, the remainder of the sealant material 10 forms a second portion 26, which can be cured at a later time or different location.

Alternatively, the partially cured portion 20 may be formed by exposing a surface of the sealant material 10 to a stimulus (e.g., heat) that first activates (e.g., softens) the portion 20 and then the portion 20 may be exposed to another stimulus (e.g., cooling) for curing. Preferably, the amount of heat used to activate the portion 20 is enough to soften the portion 20 without causing any substantial degree of flow. In this manner, the sealant material 20 can generally maintain the shape in which it was originally formed until it is later activated to flow over a substrate.

The partially cured portion 20 may be formed to most any depth within the sealant material 10 depending on the stimulus applied to the portion 20, the length of time of exposure to the stimulus and the like. Moreover, the length or depth of the selectively or partially cured portion 20 may be varied at different locations of the sealant material 10 as desired or depending upon the substrate to which the material 10 is being applied.

One particularly advantageous feature of the present invention is the ability to cure the present materials in the absence of a photo-initiator. Thus, while photoinitiators might be employed in some applications, in one preferred embodiment, the composition of the present invention is substantially free of a photoinitiator.

Curing or partial curing of the sealant material may also be effected using an acid cure for inducing homopolymerization on or within the material, or with a suitable liquid for effectuating the initiation of a condensation reaction. By way of example, a partial cure of a surface of the sealant material may be undertaken with any suitable acid, but more preferably with a mild acid (such as phosphoric acid, citric acid or the like). It may also be performed by coating with a water dispersed or 100% amine-based liquid curing agent suitable for condensation polymerization. Under either approach, the liquid may optionally be rinsed after application.

Before or after formation of the partially cured portion 20, the sealant material 10 is typically placed adjacent the substrate 12 such that the melt flowable portion 26 of the substrate 12 will be permitted to flow over a portion of the substrate 12. In Fig. 3, the strip of sealant material 10 is placed in the channel 18 such that a length

of the strip extends along a length of the channel 18 and such that a width of the strip generally spans a width of the channel 18. Preferably, the melt flowable portion 26 is directly adjacent the overlapping portion of the panels 14, 16 and the partially cured portion 20 of the sealant material 10 faces out of the channel 18.

5 Once the sealant material 10 is situated as desired, the material 10 is exposed to heat or elevated temperature, such as from an e-coat process or other paint operation cycle thereby causing the flowable portion 26 to cover a portion of the substrate 12. In Fig. 4, the sealant material 10 is shown after it has been heated to a flowable state permitting the material 10 to intimately contact the overlapping
10 portions of the panels 14, 16.

The sealant material of the present invention may be employed in any suitable thickness (e.g., from about 1 mil to about 10 mm, and more preferably about 1 to 5 mm).

In one particularly preferred embodiment, a sealed joint prepared in
15 accordance with the present invention is further coated with a top coat (e.g., a paint) and optionally a primer (between the top coat and the joint), a clear coat (e.g., a polyurethane, an acrylic such as a glycidyl methacrylate (GMA)-based coating, or a mixture thereof) over the top coat, or a combination thereof. Preferably one such coating is a water-based coated, although solvent based coatings may also be used.
20 In one embodiment, the coating includes a two component polyurethane coating. In another embodiment the coating is applied as a powder coating. Preferably an electocoating process is used to apply a coating layer, such as the primer.

The preferred embodiment of the present invention has been disclosed. A person of ordinary skill in the art would realize however, that certain modifications
25 would come within the teachings of this invention. Therefore, the following claims should be studied to determine the true scope and content of the invention.

CLAIMS

WHAT IS CLAIMED IS:

1. An article of manufacture, comprising:

- 5 a) a first panel;
- b) a second panel adjoining said first panel;
- c) a sealant over said first panel and said second panel; said sealant material including
- i. up to about 80% of an epoxy resin;
- 10 ii. up to about 40% of an epoxy/elastomer hybrid;
- iii. up to about 40% of a rheology modifier;
- iv. up to about 5% of a blowing agent;
- v. up to about 7% of a curing agent; and
- vi. a filler;
- 15 d) a layer of primer over said sealant; and
- e) a layer of paint over said primer.

2. An article of manufacture, comprising:

- a) a first panel;
- 20 b) a partially cured sealant over said first panel and said second panel; said sealant material including
- i. up to about 80% of an epoxy resin;
- ii. up to about 40% of an epoxy/elastomer hybrid;
- iii. up to about 40% of a rheology modifier other than an
- 25 ethylene vinyl acetate;
- iv. up to about 5% of a blowing agent;
- v. up to about 7% of a curing agent; and
- vi. about 40 to about 60 % of a filler, said sealant being substantially free of a photoinitiator.

3. An article of manufacture, comprising:

- a) a first metal automotive vehicle panel selected from aluminum, steel or reinforced plastic;

- b) a second automotive vehicle panel selected from aluminum, steel or reinforced plastic adjoining said first panel;
- c) a sealant over said first panel and said second panel; said sealant material including

- 5 1. about 10 to about 50 parts by weight of an epoxy resin;
- 2. about 10 to about 30 parts by weight of an epoxy/elastomer hybrid having about 1:3 to 3:1 parts of epoxy to elastomer;
- 10 3. less than about 10 parts by weight of a rheology modifier including an acrylic;
- 4. up to about 5 parts by weight of an azocarbonamide blowing agent;
- 5. up to about 7 parts by weight of a curing agent including an amine; and
- 15 6. about 40 to about 60 parts by weight of a mineral filler;
- d) a layer of primer, applied by electrocoating, over said sealant;
- e) a layer of two component polyurethane paint over said primer; and
- 20 f) a clear coat layer over said paint.

4. The article of claim 1, wherein said sealant is substantially free of a photoinitiator.

25 5. The article of claim 1, wherein said sealant is substantially free of ethylene vinyl acetate.

6. The article of claim 1, wherein said sealant is substantially free of ethylene vinyl acetate and a photoinitiator.

30 7. The article of claim 1, wherein said sealant has been partially cured.

8. The article of claim 2, wherein said epoxy resin is present in an amount of about 10 to about 50 % by weight, and said epoxy/elastomer hybrid is present in an amount of about 10 to about 30 % by weight and has about 1:3 to 3:1 parts of epoxy to elastomer.

5

9. The article of claim 8, wherein said filler is a mineral filler.

10. The article of claim 3, wherein said sealant is substantially free of a photoinitiator.

10

11. The article of claim 3, wherein said sealant is substantially free of ethylene vinyl acetate.

12. The article of claim 3, wherein said sealant is substantially free of ethylene vinyl acetate and a photoinitiator.

15

13. The article of claim 3, wherein said sealant has been partially cured.

14. The article of claim 3, wherein said sealant is self leveling at elevated temperatures for providing a smooth paintable surface.

20

1/2



Fig-1

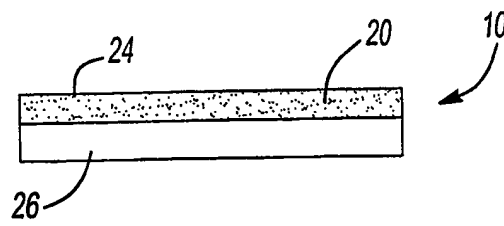


Fig-2

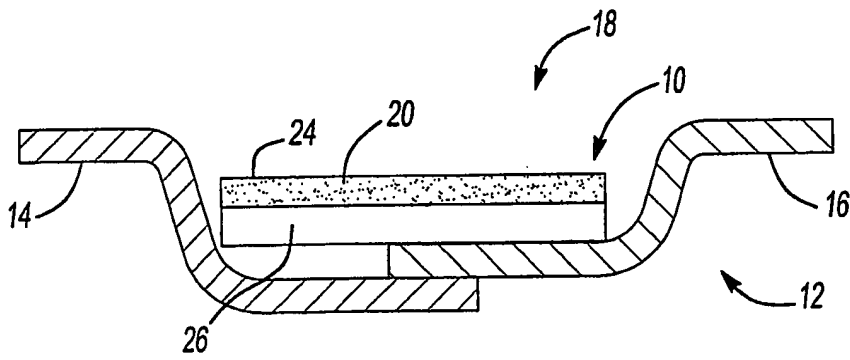


Fig-3


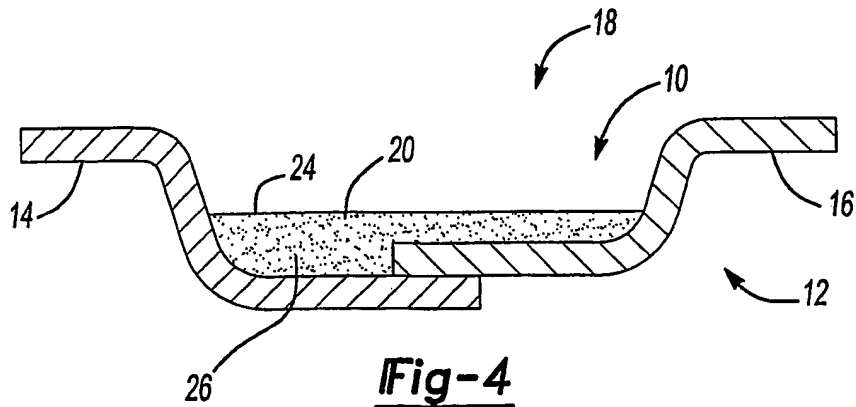


Fig-4

2/2

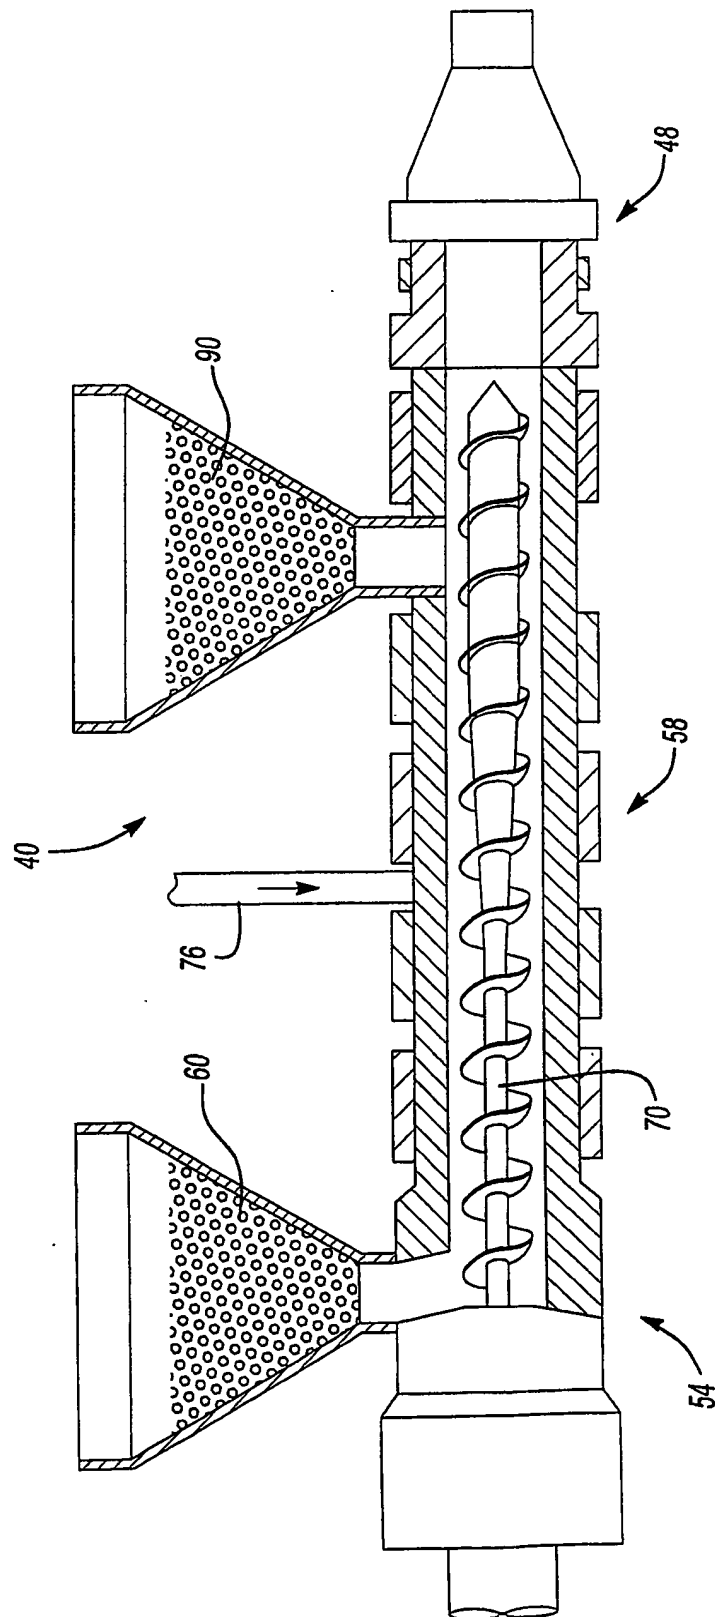

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/US 02/23957

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08L53/02 C08L63/02 C09J163/00 C08L23/08 C08J9/00
 C08L63/00 C08G59/68 C09D127/06 C08L77/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08L C09J C08J C08G C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 01 88033 A (FITZGERALD GERALD ;SIKA CORP (US); CHANG CHIN JUI (US)) 22 November 2001 (2001-11-22) page 3, line 13 - line 20 page 4, line 5 -page 5, line 23 page 6, line 16 -page 7, line 33 page 8, line 11 - line 14 abstract; claims 1-10 ---	1-14
X	US 6 235 842 B1 (HAGIWARA SHINSUKE ET AL) 22 May 2001 (2001-05-22) column 3, line 53 -column 4, line 57 column 13, line 20 -column 14, line 13 column 15, line 14 - line 44 column 17, line 52 -column 18, line 6 column 19, line 65 -column 20, line 14 abstract; claims 1-8 --- -/--	1-14

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

27 September 2002

Date of mailing of the international search report

09/10/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Glomm, B

INTERNATIONAL SEARCH REPORT

Internal Application No

PCT/US 02/23957

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 162 504 A (LUKANICH JOSEPH D ET AL) 19 December 2000 (2000-12-19) column 2, line 41 -column 3, line 14 column 5, line 9 - line 67 column 7, line 25 - line 62 abstract; claims 1-7,22-25 ---	1-14
X	US 6 136 944 A (KINCAID DEREK SCOTT ET AL) 24 October 2000 (2000-10-24) column 1, line 42 -column 2, line 5 column 5, line 45 -column 6, line 12 column 7, line 34 -column 8, line 26 abstract; claims 1-15 ---	1-14
X	US 6 136 398 A (MEYER CHRISTOPHER M ET AL) 24 October 2000 (2000-10-24) column 1, line 61 -column 2, line 13 column 3, line 23 -column 4, line 64 column 8, line 46 -column 9, line 10 column 11, line 60 -column 14, line 9 abstract; claims 1,16-19 ---	1-14
X	WO 00 27920 A (SIKA CORP) 18 May 2000 (2000-05-18) page 3, line 5 -page 4, line 13 page 4, line 25 -page 5, line 18; table 1 page 7, line 11 - line 26 abstract; claims 1-15,21-24,56 ---	1-14
X	WO 97 12929 A (HENKEL CORP ;DULLER DAVID R (US); MARBRY DAVID L (US)) 10 April 1997 (1997-04-10) page 2, line 11 - line 26 page 5, line 7 - line 17 abstract; claims 1-9,25-27 ---	1-14
X	EP 0 442 178 A (GERACE MICHAEL J ;GERACE JANET M (US)) 21 August 1991 (1991-08-21) page 3, line 5 - line 31 page 5, line 23 - line 28 abstract; claims 1-7 -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/23957

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0188033	A	22-11-2001	AU 5977201 A	26-11-2001
			WO 0188033 A1	22-11-2001
US 6235842	B1	22-05-2001	AU 4571297 A	05-05-1998
			WO 9815597 A1	16-04-1998
			JP 3226550 B2	05-11-2001
US 6162504	A	19-12-2000	AU 1703599 A	16-06-1999
			WO 9928378 A1	10-06-1999
			ZA 9811084 A	26-07-1999
US 6136944	A	24-10-2000	NONE	
US 6136398	A	24-10-2000	AU 2987799 A	23-11-1999
			EP 1075498 A1	14-02-2001
			JP 2002513836 T	14-05-2002
			WO 9957197 A1	11-11-1999
WO 0027920	A	18-05-2000	US 6387470 B1	14-05-2002
			AU 1319900 A	29-05-2000
			EP 1155084 A1	21-11-2001
			WO 0027920 A1	18-05-2000
			US 6368438 B1	09-04-2002
WO 9712929	A	10-04-1997	AU 7550596 A	28-04-1997
			BR 9610767 A	13-07-1999
			CA 2233304 A1	10-04-1997
			CN 1198760 A , B	11-11-1998
			EP 0857186 A1	12-08-1998
			JP 11512776 T	02-11-1999
			WO 9712929 A1	10-04-1997
			US 5739184 A	14-04-1998
EP 0442178	A	21-08-1991	US 4900771 A	13-02-1990
			EP 0442178 A1	21-08-1991
			JP 3239776 A	25-10-1991
			US 5039768 A	13-08-1991